

12-03-01 JC18 Rec'd PCT/PTO 29 NOV 2001

PCT-PTO-1390 DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE (REV 10-2000)		ATTORNEY'S DOCKET NO. 13201.0024.NPUS00
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371		U.S. APPLICATION NO. (If known, see 37 CFR 1.5) 09/980479
INTERNATIONAL APPLICATION NO. PCT/KR99/00545	INTERNATIONAL FILING DATE September 14, 1999	PRIORITY DATE CLAIMED May 31, 1999 (Korea Pat. App. No: 1999/19816)
TITLE OF INVENTION OPTICAL CABLE CLOSURE MAINTENANCE SYSTEM		
APPLICANT(S) FOR DO/EO/US SAMJIN INTELLIGENCE COMMUNICATION CO., LTD.,; JAE-SUNG LEE		
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:		
<ol style="list-style-type: none">1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.3. <input checked="" type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f)).4. <input checked="" type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (PCT Article 31).5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)).<ol style="list-style-type: none">a. <input checked="" type="checkbox"/> is attached hereto (required only if not transmitted by the International Bureau).b. <input checked="" type="checkbox"/> has been communicated by the International Bureau.c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).6. <input checked="" type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)).7. <input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)).<ol style="list-style-type: none">a. <input type="checkbox"/> are attached hereto (required only if not transmitted by the International Bureau).b. <input type="checkbox"/> have been communicated by the International Bureau.c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.d. <input checked="" type="checkbox"/> have not been made and will not be made.8. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).9. <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).10. <input type="checkbox"/> An English translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).		
Items 11 to 16 below concern document(s) or information included:		
<ol style="list-style-type: none">11. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.13. <input type="checkbox"/> A FIRST preliminary amendment. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment.14. <input type="checkbox"/> A substitute specification.15. <input type="checkbox"/> A change of power of attorney and/or address letter.16. <input checked="" type="checkbox"/> Other items or information: (A) POSTCARD; (B) PCT NOTIFICATION OF RECEIPT OF RECORD COPY (10/12/1999); (C) PCT NOTIFICATION CONCERNING SUBMISSION OR TRANSMITTAL OF PRIORITY DOCUMENT (10/12/1999); (D) PCT NOTIFICATION OF TRANSMITTAL OF THE INTERNATIONAL SEARCH REPORT OR THE DECLARATION (3/29/2000); (E) PCT INTERNATIONAL SEARCH REPORT (3/29/2000); (F) PCT NOTICE INFORMING THE APPLICANT OF THE COMMUNICATION OF THE INTERNATIONAL APPLICATION TO THE DESIGNATED OFFICES (12/7/2000); (G) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT) (12/7/2000); (H) PCT NOTIFICATION OF TRANSMITTAL OF INTERNATIONAL PRELIMINARY EXAMINATION REPORT (11/5/2001); (I) INTERNATIONAL PRELIMINARY EXAMINATION REPORT (PCT) (7/27/2001).		

CERTIFICATE OF EXPRESS MAILING	
NUMBER	EL392863630US
DATE OF DEPOSIT	NOVEMBER 29, 2001
I hereby certify that this paper or fee is being deposited with the United States Postal Service "EXPRESS MAIL POST OFFICE TO ADDRESSEE" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to Commissioner for Patents, Washington, DC 20231	
Signature	

U.S. APPLICATION NO. (if known, see 37 CFR 1.5) 097/980479		INTERNATIONAL APPLICATION NO. PCT/KR99/00545		ATTORNEY'S DOCKET NUMBER 13201.0024.NPUS00	
17. <input checked="" type="checkbox"/> The following fees are submitted:				CALCULATIONS PTO USE ONLY	
Basic National Fee (37 CFR 1.492(a)(1)-(5)): Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$1000.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO..... \$860.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$710.00 international preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$690.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00					
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$860.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input checked="" type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$130.00	
Claims	Number Filed	Number Extra	Rate		
Total Claims	3 - 20 =		x \$ 18.00	\$0.00	
Independent Claims	1 - 3 =		x \$ 80.00	\$0.00	
Multiple dependent claim(s) (if applicable)			+ \$270.00	\$-0.00	
TOTAL OF ABOVE CALCULATIONS =				\$990.00	
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$.00	
SUBTOTAL =				\$990.00	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$.00	
TOTAL NATIONAL FEE =				\$990.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property)				\$.00	
TOTAL FEES ENCLOSED =				\$990.00	
				Amount to be refunded:	\$.00
				Charged	\$990.00
a. <input type="checkbox"/> A check in the amount of \$.00 cover the above fees is enclosed. b. <input checked="" type="checkbox"/> Please charge my Deposit Account No. <u>01-2508/13201.0024.NPUS00</u> in the amount of \$ <u>990.00</u> to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>01-2508/13201.0024.NPUS00</u> . A duplicate copy of this sheet is enclosed.					
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.					
SEND ALL CORRESPONDENCE TO:					
JEFFREY E. KUBIAK HOWREY SIMON ARNOLD & WHITE, LLP 750 Bering Drive Houston, TX 77057-2198 (713) 787-1400					
SIGNATURE <u>Jeffrey E Kubiak</u> JEFFREY E. KUBIAK <u>November 29, 2001</u> NAME P-50,013 REGISTRATION NUMBER:					

WO 00/73834

PCT/KR99/00545

1

Optical Cable Closure Maintenance System**Technical Field**

The present invention relates to an optical cable closure, or more particularly to the maintenance system capable of detecting inundation at said closure including

5 a no-power electronic sensor without opening the same.

Background Art

Generally, the step of connecting the central office to the subscribers with optical cables requires many connection points. At these connection points, the connection materials for the optical cable, for example the optical cable closure or

10 optical intermediate switch box or vacant terminal box, are installed to connect the optical cables to each other. The connection materials for the optical cable not only connect the optical cables snapped to each other, but also perform the task of avoiding a deterioration of the connection region due to the external environment.

The optical cable closure is commonly installed at a manhole etc. so that the

15 connection region of the optical cable is protected from the external environment. However, it must have superior protection characteristics against the environment than other connection materials since the contaminated water is frequently full at the manhole etc. in contrast to the atmosphere, and the degree of air contamination existing at the manhole is more severe than that at the atmosphere. Particularly, the optical

20 cable closure basically should have capability of sealing for cutting off permeation of contaminated water into the closure.

If the state of inundation at the closure with the exposure of the optical fiber to moisture is continued, the function of the optical fiber is lost. Fig. 1 is a graph indicating the process at the varying intensity of the optical fiber as a function of time. Fig.2a is a diagram showing the surface of the optical fiber in normal environment, Fig.2b is a diagram showing the surface of the optical fiber after being exposed to moisture for a long period time, and Fig.2c is a diagram indicating the surface of the optical fiber exposed to chemicals. As shown in the drawings, it was found that the optical fiber is negatively affected and damaged thereby when the optical fiber is exposed to moisture or chemicals.

As described above, the fact that the performance of the optical fiber is degraded can be found only after the predetermined time has passed with exposure to moisture. In other words, since the defect in the communication equipment can be discovered only after a long period of time in the state of inundation of the optical cable closure, the subscribers who benefited the communication equipment meanwhile must put up with the inconvenience of generation of error or interruption in communication.

On the other hand, the conventional closure for the optical cable is waterproof by resealing the exterior of the closure with a gel compound etc. under sealing or by using a material such as sealing tapes in order to prevent water from permeating into the closure. In this case, it is impossible to check as to whether the water has permeated into the closure when the phenomena of aging occurs due to the defective

work or closure or the long term use thereof. Further, in addition to the fact that the waterproof material can not be recycled therein, the conventional closure entails inconvenience and economical loss since it involves reworking after dismantling in case of a problem within the box, with the result of much loss in human resources.

5 The object of the present invention, in resolving the aforementioned problems, is to provide a maintenance system capable of detecting inundation of the optical cable closure without opening the same.

 The another object of the present invention is to provide an optical cable closure comprising a highly sensitive no-power electronic sensor.

10 The another object of the present invention is to provide a maintenance system capable of recording and storing the periodic measurement values of changes in humidity and temperature of the optical cable.

 The another object of the present invention is to reduce the cost of human resources and the maintenance of the closure.

15 To achieve these goals, the present invention relates to an optical cable closure maintenance system comprising a closure including a sealed no-power electronic sensor, and a water sensing meter for detecting information about the temperature and humidity within the closure, provided through the no-power electronic sensor, wherein the inundation therein can be detected without opening the closure.

20 The detailed feature of the present invention is that said water sensing meter comprises an A/D converter converting a sensor analog signal of the humidity and

temperature within the closure detected by the no-power electronic sensor into a digital signal, a key entry part inputting a control signal and set data and the like according to a mode selection key, an up/down key and other respective functions, handled selectively by an user, a micom performing a general control function a set program, receiving inputs signals outputted from the respective portion, a liquid crystal display displaying the result of humidity detection, temperature detection and respective parameters at the closure provided by said A/D converter with numerals and letters, an alarm generator generating a failure alarm according to the control signal of the micom, a memory device for storing information provided by said A/D converter and an output signal of said micom, and an interface for outputting the information of said memory device to an external device.

The another detailed feature of the present invention is that said micom comprises a set memory having an allowable threshold value information in the ratio of temperature to humidity at the closure.

Brief Description of the Drawing

Fig. 1 is a graph indicating the process at the varying intensity of the optical fiber as a function of time.

Fig.2a is a diagram indicating the surface of the optical fiber in the normal environment.

Fig.2b is a diagram indicating the surface of the optical fiber after being exposed to moisture for a long period of time.

Fig.2c is a diagram indicating the surface of the optical fiber exposed to chemicals.

Fig.3 is a block diagram indicating the maintenance system according to the present invention.

5 Fig.4 is a diagram indicating the water sensing meter of the Fig.3.

Detailed Description of the Preferred Embodiment

The constitution and operation features of the present invention are described in detail with accompanying drawings as follows. Fig.3 is a block diagram indicating the maintenance system according to the present invention. The invention comprises

10 a closure (10) including a sealed no-power electronic sensor (11), and a water sensing meter (20) for detecting information about temperature and humidity within the closure, provided by said no-power electronic sensor (11). The water sensing meter (20) comprises an A/D converter (21) converting an analog signal detected by the no-power electronic sensor (11) at the closure (10) into a digital signal, a key entry part

15 (22) inputting a control signal of user, a micom (23) performing a general control function by a set program inputted by each output signals, a liquid crystal display (hereinafter LCD) (25) displaying information of detection results and respective parameter, provided by said A/D converter (21), an alarm generator (24) generating a warning alarm according to the control signal of said micom (23), a memory device

20 (27) for storing information provided by said A/D converter (21) and an output signal of said micom (23), and an interface (26) for outputting the information of said memory

device (27) to the external device.

The closure (10) is basically sealed not to be inundated, however it is assumed that said box could be inundated since the point of the present invention is that the device can detect inundation which could occur as the time of sealing goes by. A highly sensitive no-power electronic sensor (11) is included in the form of a module within the closure (10) in order to detect temperature and humidity therein. The information detected by said no-power electronic sensor (11) is outputted in such manner of a serial port as RS232C, etc. The detection result of temperature and humidity in an analog style outputted by said no-power electronic sensor (11) is converted into the digital value through the A/D converter (21).

The converted sensor information of the temperature and humidity is delivered to a micom (23) by the buffer (not shown). The user can set an allowable temperature range of the temperature spec included at the water sensing meter (20), and the detection temperature within the allowable temperature in which the range is -30°C ~ 100°C is indicated at the LCD (25) with a digital unit of 1°C . Similarly, the humidity detected by the humidity spec therein is also indicated in the unit of 1%. The allowable threshold value information of the ratio of the temperature to the humidity is stored at the predetermined memory at the micom (23). Using this information, the micom (23) can recognize water permeation and surplus humidity within the closure through the detected information of the temperature and humidity.

Fig.4 is a diagram indicating the water sensing meter (20) according to the

present invention. The water sensing meter (20) comprises a power switch (31) for switching the power supply of the water sensing meter, a mode selection switch (32) for selecting the sensing mode of the user, an up/down control key (33), a reset switch (36) for resetting the setting condition, a luminescence (35) for indicating a normal or fault condition, a LCD (34) displaying the operation condition and measurement results of the water sensing meter (20) with numerals and letters, a PS/2 port (38) receiving a sensor information of temperature and humidity from the electronic sensor (11) at the closure (10), and a printing switch (37) for outputting the detection results of the water sensing meter (20) via the interface (26) included through the serial port.

The description of the main operation procedure of said water sensing meter (20) is as follows. When the power of the water sensing meter (20) is turned on, the micom (23) executes an operation according to the program stored in the ROM (not shown) with built-in instruction codes. The initial operation is to turn on the normal lamp of the luminescence (35) and indicate the time value received from the real time clock (not shown) to the LCD (34). At this time, the time value allows the error range of 1/100 sec., and is controllable using the mode selection switch (32). The expanded timer supported till 2100 year is used.

The backup power supply of said timer operates separately from the main power supply. The LCD (34) is a low power LCD capable of indicating 2 lines x 8 letters, and has a function of indicating not only the temperature/humidity measurement results detected through the no-power electric sensor (11), but also the

output state of the real time and each parameter.

The detected humidity value is read after specifying the mode to humidity using the mode selection switch (32) formed at the key input (22). The micom (23), like a conventional controller, comprises a ROM and RAM with built-in programs.

- 5 The micom (23) compares the allowable base value of the ratio of the temperature to the humidity from the ROM to the measured humidity. If the measured humidity exceeds the allowable base value, the alarm is generated through the alarm generator (24) and the alarm display is indicated through the luminescence (35). The normal state is changed into the fault state if the detected humidity in the normal state exceeds
- 10 the allowable base value. Therefore, the current state (humidity saturation or water permeation) of the closure being detected can be known.

In the same manner, the measured temperature value within the closure can be read by converting the mode selection switch (32) to the temperature sensor mode. Now, the user can set the proper temperature range, and the method is as follows:

- 15 selecting a set mode with pushing all of the selection switches for 5 seconds at the temperature measurement display;

adjusting the lowest allowable temperature and the highest allowable temperature in order by the up/down control key (33); and

- indicating the temperature alarm display with an alarm if the sensing
- 20 temperature exceeds the set temperature range, turning on the fault state lamp showing state where the temperature detection result at the closure is not within the proper

range.

On the other hand, each detected data of the temperature and the humidity using the mode selection switch (32) can be stored or deleted by the up/down control key (33). The values included in the temporary memory can be printed in a serial port manner by pushing a print selection switch (37). At this time, the measurement number, values for year/month/date/hour/minute, measurement order, measured humidity value and measured temperature value in order are outputted. A reset switch (36) which is not described here is to initialize the device when the water sensing meter (20) itself has a failure or faulty operation.

As described above, the optical cable closure maintenance system according to the present invention can recognize whether the inundation has occurred in the closure without opening the box, thereby preventing economic loss and waste of human resource due to the opening with respect to the components consumed for avoiding inundation.

Further, it is advantageous in that consistent maintenance can be done since the optical path section applying the optical cable closure maintenance system according to the present invention can be measured periodically, handling the information thereof, and these outputs obtained therefrom can be utilized as a main recorded information of the optical path section.

Additionally, it has the effect of preemptively preventing the damage loss caused by occurrence of an accident and failure at the optical cable connection point

due to a fault, deformation, damage or inundation of the closure.

2000-10-10 10:10:10

Claims

What is claimed is:

1. An optical cable closure maintenance system comprising a closure containing a sealed no-power electric sensor, and a water sensing meter for detecting information of temperature and humidity inside of the closure, provided by said no-power electric sensor, wherein the inundation therein can be detected without opening said closure.

2. An optical cable closure maintenance system of Claim 1, wherein said water sensing meter comprises:

an analog/digital converter converting analog signal of humidity and temperature within the closure, detected by the no-power electronic sensor into a digital signal,

a key entry part inputting a control signal and set data according to a mode selection key, an up/down key and other respective functions, manipulated selectively by an user,

a micom performing a general control function by a set program, receiving inputs of the signals outputted from the respective parts,

a LCD part displaying, in numerals and letters, the result of humidity and temperature detections within the closure and respective parameters, provided via said analog/digital converter,

an alarm generator generating a failure alarm according to the control signal of said micom,

a memory device for storing information provided by said analog/digital converter and an output signal of said micom, and
an interface for outputting the information of said memory device to an external device.

- 5 3. An optical cable closure maintenance system of Claim 2, wherein said micom comprises a set memory having information of an allowable threshold value of the ratio of temperature to humidity within said closure.

2001-10-06 14:00:00

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
7 December 2000 (07.12.2000)

PCT

(10) International Publication Number
WO 00/73834 A1

- (51) International Patent Classification⁷: G02B 6/44, (71) Applicant and
H02G 15/10, 15/18 1-00(72) Inventor: LEE, Jae-Sung [KR/KR]; #602-303 Kukhwa
Apartment, 991 Samchun-dong, Seo-ku, Taejeon-shi
(21) International Application Number: PCT/KR99/00545 302-222 (KR).
(22) International Filing Date: 14 September 1999 (14.09.1999) (74) Agents: YIM, Suk, Jae et al.; 8th floor, Poonglim Build-
ing, 823-1 Yeoksam-dong, Kangnam-ku, Seoul 135-784
(25) Filing Language: English (KR).
(26) Publication Language: English (81) Designated States (national): CN, DE, JP, US.
(30) Priority Data: 1999/19816 31 May 1999 (31.05.1999) KR Published:
— With international search report.
(71) Applicant (for all designated States except US): SAMJIN
INTELLIGENCE COMMUNICATION CO., LTD.
[KR/KR]; #535-9 Kwan-ri, Majang-myun, Yichon-shi,
Kyungki-do 467-810 (KR).
For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: OPTICAL CABLE CLOSURE MAINTENANCE SYSTEM

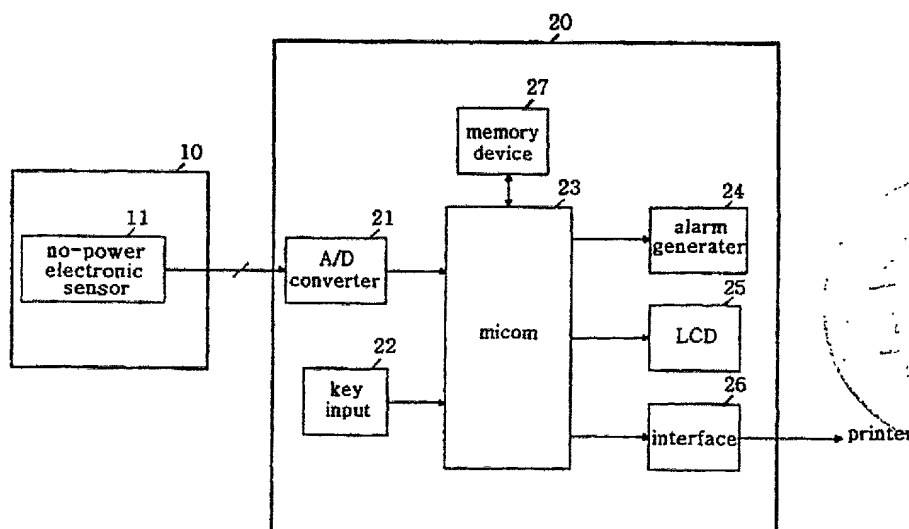

(57) Abstract: The present invention relates to an optical cable closure maintenance system comprising a closure (10) including a sealed no-power electronic sensor (11), and a water sensing meter (20) for detecting information about the temperature and humidity within the closure (10), provided through the no-power electronic sensor (11), wherein the inundation therein can be detected without opening the closure (10).

WO 00/73834 A1

1/4
FIG.1


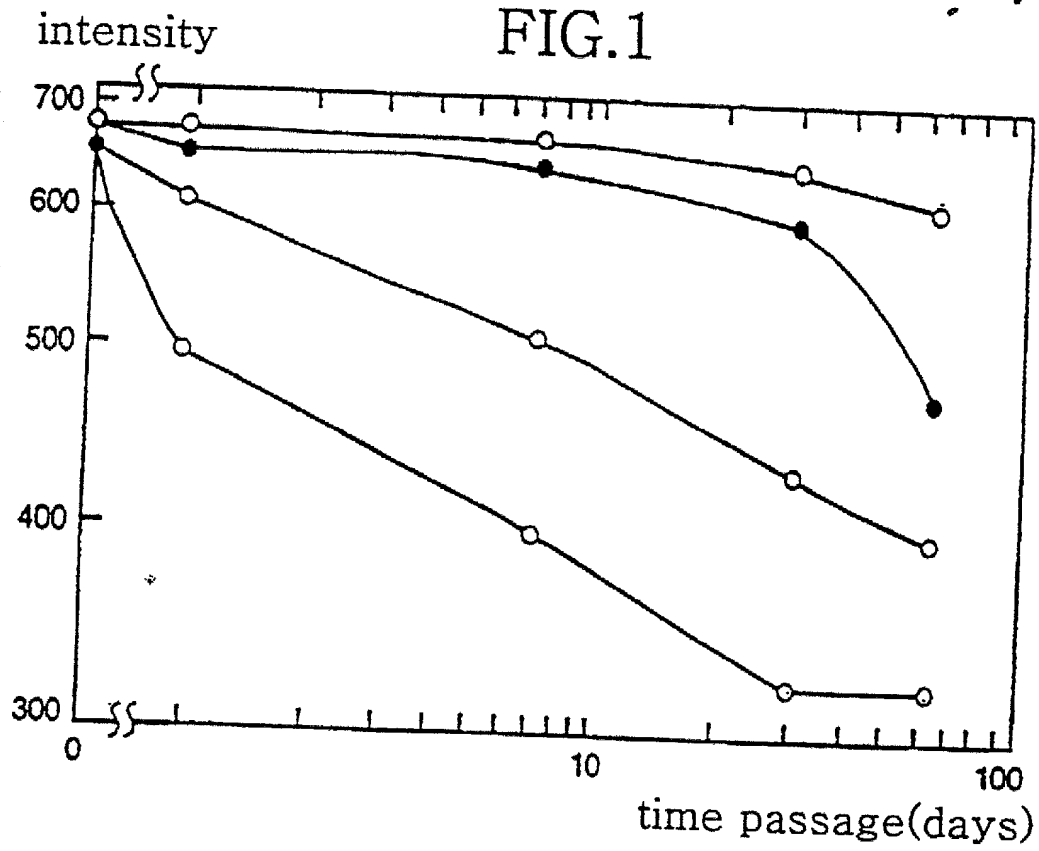


FIG.2A

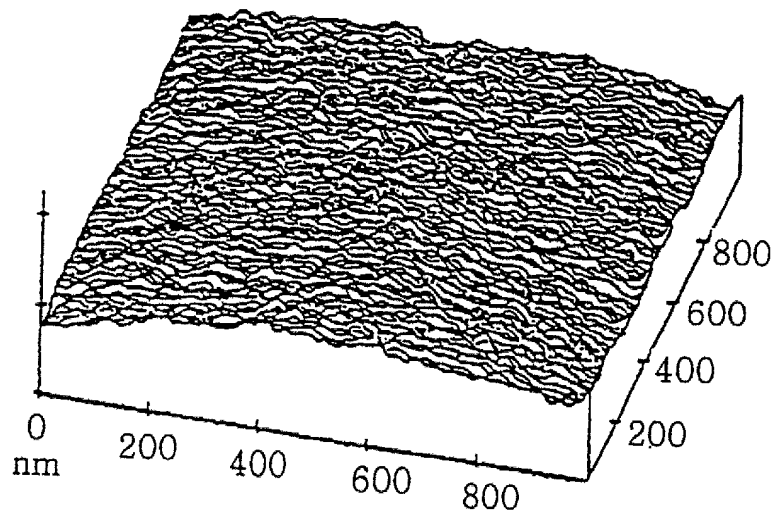

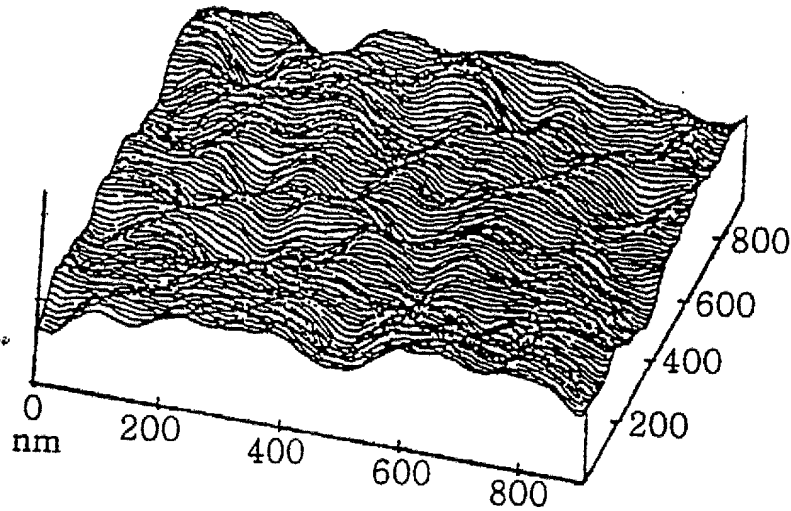
2/4
FIG.2B

FIG.2C



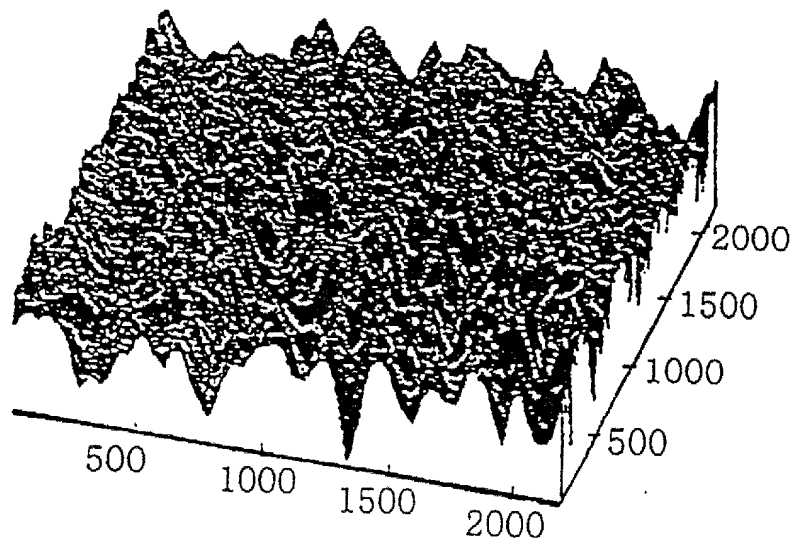


FIG.3

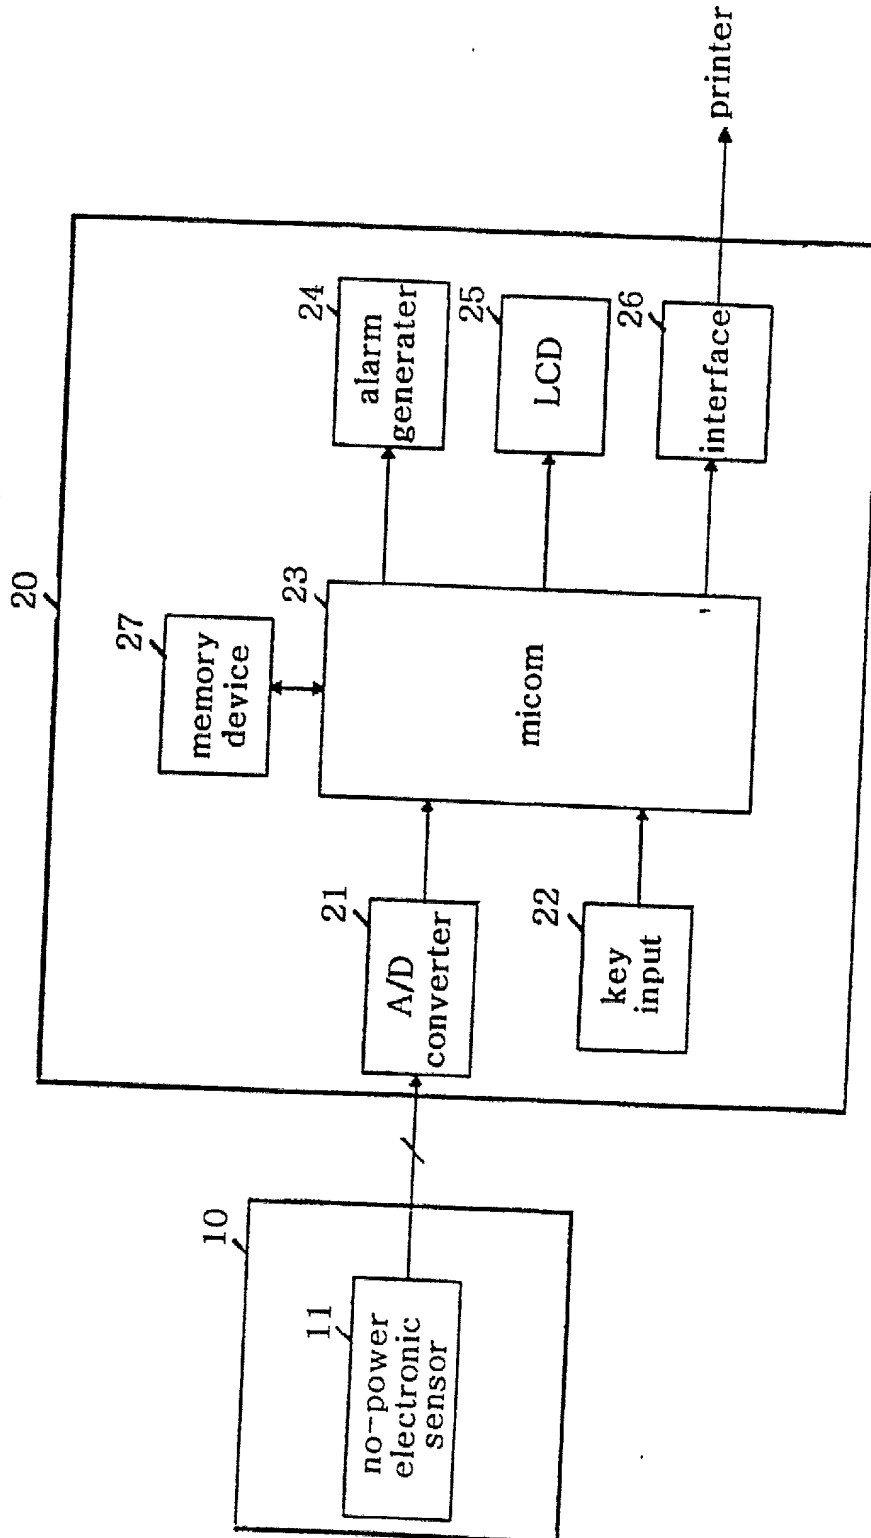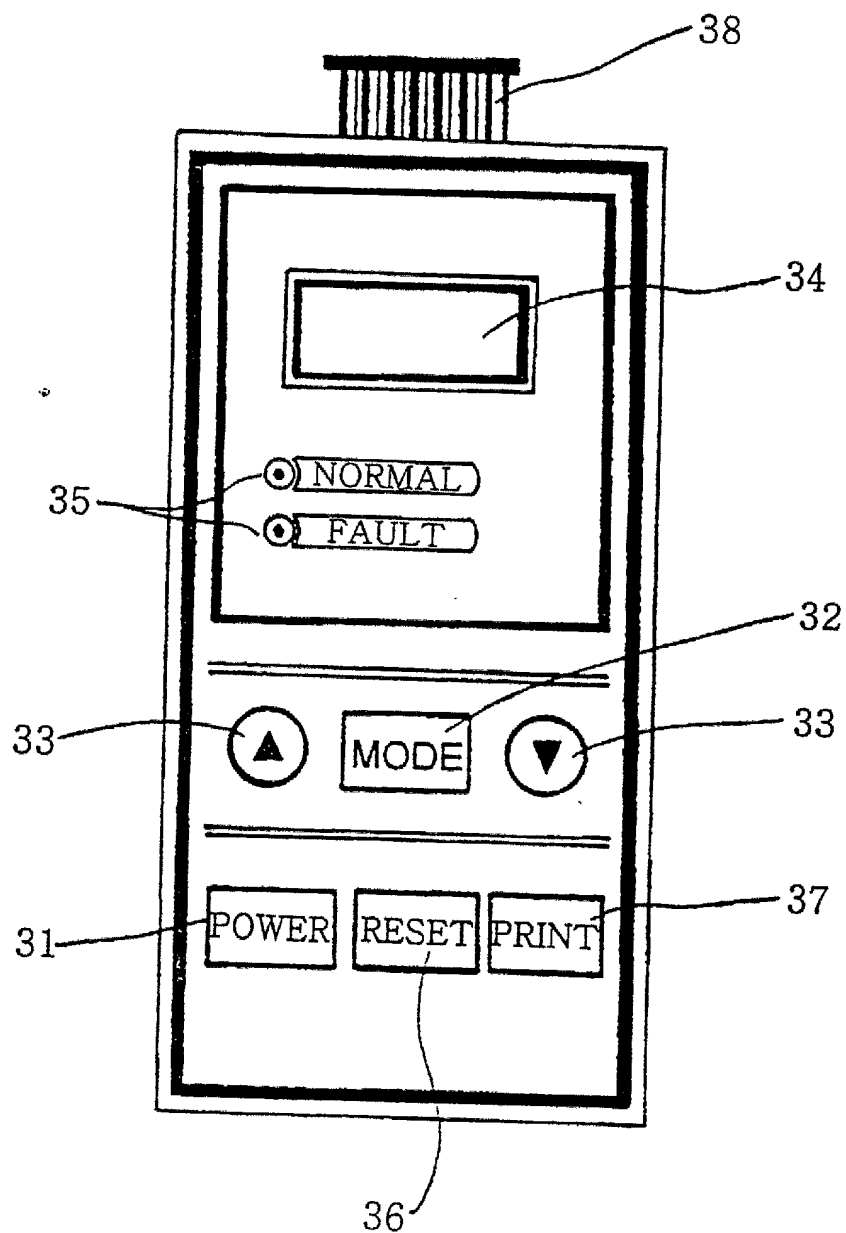

4/4
FIG.4

Declaration and Power of Attorney for Patent Application

특허 출원 관련 선언 및 위임권

Korean Language Declaration

여기 서명한 발명자로서, 본인은 하기 사항을 선언합니다.

As a below named inventor, I hereby declare that:

본인의 거주지, 우송 주소 및 국적은 본인의 성명 아래에 기재된 것과 동일합니다.

My residence, post office address and citizenship are as stated next to my name.

본인은 하기 명시된 발명에 대한 특허를 청구하는 주제의 최초 및/또는 공동 발명자이거나 (아래에 한 이름만이 기재된 경우) 또는 최초 및/또는 공동 발명자임을 (아래에 여러 이름이 기재된 경우) 확인합니다.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

OPTICAL CABLE CLOSURE

MAINTENANCE SYSTEM

여름 날이 서늘되어 있지 않으면 온 방의 열이 빠져 나가게 됩니다.

the specification of which is attached hereto unless the following box is checked:



미국특허 출원번호 또는 PCT 국제 출원번호는

_____로

_____일 때 출원되었고

_____일 때 개정되었음

(적용 경우).



was filed on November 29, 2001

as United States Application Number or PCT

International Application Number

09/980,479 and was amended on

_____ (if applicable).

본인은 상기 개정에 의해 수정된 상기 명세서는 물론 특허 청구의 내용을 심사했으며 이해했음을 확인합니다.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

본인은 연방 규정 코드인 37 CFR 제 1.56항에 의거하여 특허 가액에 관한 적고 필요를 공개할 의무를 인정합니다.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

Page 1 of 3

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. **DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.**

Korean Language Declaration

본인은 외국인 특허 출원(들)이나 발명자의 출원서 관련 경우에는 대한민국 고등 제35장의 제17.9(a)-(d)항에나 제36S(b)항에 의거하여 또는 대한민국 특허법 제122조 제2항에 따라 PCT 국제 출원의 경우에는 제36S(a)항에 의거하여 자기 출원된 특허 출원의 외국 우선권을 주장하며, 외국인 특허 출원, 발명자 출원서 또는 우선권 주장되는 출원일 이전에 제출된 PCT 국제 출원도 또한 여기에 해당함을 재확인합니다.

I hereby claim foreign priority under Title 35, United States Code, § 110(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 36S(a) of any PCT International application which designated at least one country other than the United States. Listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed
우선권 주장 없음

PCT/KR99/00545

PCT

14/Sept/1999

(Number)
(번호)

(Country)
(국가)

(Day/Month/Year Filed)
(출원일자 월/일/년)

1999/19816

Korea

31/May/1999

(Number)
(번호)

(Country)
(국가)

(Day/Month/Year Filed)
(출원일자 월/일/년)

본인은 대한민국 고등 제35장 제119항(e)에 명시된 바와 같이 자기 대한민국 출원서에 관련된 출원을 요구합니다.

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

(Application No.)
(출원 번호)

(Filing Date)
(출원일자)

(Application No.)
(출원 번호)

(Filing Date)
(출원일자)

본인은 대한민국 고등 제35장의 미국인 출원(들) 관련 제120항에 명시된 바와 같이 또는 대한민국 특허법 제122조 제2항에 따라 제36S(c)항에 명시된 바와 같이 자기 출원된 출원을 요구합니다. 이 출원서에 있는 각 특허 청구의 내용이 대한민국 고등 제35장 제112항의 첫번째 항에서 명시된 바와 같이 출원의 미국 또는 PCT 국제 출원에 개시되지 않았으면 본인은 연방 규정 고등 제37장 제1.56항에 명시된 바와 같이 출원 출원일자와 이 출원서의 국내 또는 PCT 국제 출원일자 사이에 국내 자에게 대한 자료 정보를 공개할 의무를 인정합니다.

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 36S(c) of any PCT International application designating the United States. Listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

(Application No.)
(출원 번호)

(Filing Date)
(출원일자)

(Date) (inventor, patent, inventor)
(연월일)(출원자, 특허, 출원자, 오기)

(Application No.)
(출원 번호)

(Filing Date)
(출원일자)

(Date) (inventor, patent, inventor)
(연월일)(출원자, 특허, 출원자, 오기)

본인이 어느 한도 내에서 여기에 제공된 모든 내용이 사실이고, 제공된 정보가 소인이 모두 사실임을 확인하며, 이어서가 대한민국 고등 제38장의 1.001항에 명시된 바와 같이 고의의 허위 진술 및 허위 출원일 명칭, 발명자나 발명자로 허위 명칭이나 발명자 명칭을 모두 만들 수 있고, 허위 고의의 허위 진술은 자기 출원서나 국제 발명권 부여의 효도성을 위변조할 수 있음에 관하여서 여기에 진술함을 인정합니다.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the lies so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application of any patent issued thereon.

PTO/SB/110 (Rev. 5-95). Approved through 9/30/96. OMB 0651-0032. Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE. Under the Paperwork Reduction Act of 1995, no person is required to respond to a collection of information unless it contains a valid OMB control number.

Korean Language Declaration

제명권: 제명권 발명자로서 본인은 이 공백을 유권하고 이와 관련하여
유명 및 정보제공 요구하는 공부를 제명하기 위하여 여기 본포사(들)
일/도는 제명권(들)을 발행합니다. (성명 및 등록번호 기입)

POWER OF ATTORNEY: As a natural inventor, I hereby
appoint the following attorney(s) and/or agent(s) to prosecute
this application and transact all business in the Patent and
Trademark Office connected therewith (list name and
registration number)

①

Jeffrey E. Kubiak P-50,013
Howrey Simon Arnold & White LLP
750 Bering Drive - Houston, TX 77057
E-mail: jkubiak@hsawhite.com

제명권

713.787.1502

제명권 및 제명권: (성명 및 등록번호)

Direct Telephone Calls to (include) and telephone number

제명 또는 제명권 발명자의 성명	1-00	Full name of sole or first inventor	Jae-Sung Lee
발명자의 서명	성명	Inventor's signature	Date
거주지		Residence	#602-303 Kukhwa Apartment 991 Samchun-dong, Seo-lu Taejeon-shi 302-222
국적		Citizenship	KOREA
우송 주소		Post Office Address	
제명 또는 제명권 발명자의 성명		Full name of second joint inventor, if any	
제명권 발명자의 서명	성명	Second inventor's signature	Date
거주지		Residence	
국적		Citizenship	
우송 주소		Post Office Address	

(제명권 그리고 제명의 공동 발명자들에 대한 유사한 정보와
그들의 서명을 제공하십시오.)

(Supply information and signatures for third and subsequent joint
inventors.)